

XIS-1080™

PRODUCT HIGHLIGHTS

Artificial Intelligence (AI)

Enhanced Imaging™

Windows® Operating System with
Intel® Core™ Processor

Reinforced Conveyor

Real-Time Diagnostics



PRODUCT DESCRIPTION

The XIS-1080™ is a mid-size X-Ray Inspection System (XIS) with a heavy duty conveyor belt capable of supporting up to 200 kg (441 lbs.). Designed for screening luggage and oversized baggage at airports and transport facilities, it is equipped with a powerful 180kV generator for heightened inspections of dense, tightly-packed baggage and cargo.

ABOUT ASTROPHYSICS

Since 2002, Astrophysics has led the industry in research and development, creating integrated solutions to advance the critical security missions of our customers and partners. Headquartered outside of Los Angeles, CA in the USA, Astrophysics has over 40,000 systems deployed in more than 150 countries, safeguarding critical infrastructure, aviation, and ports and border sites worldwide.

XIS-1080™

GENERAL SPECIFICATIONS

| | |
|---|--|
| Tunnel Size: (WxH) | 100.1 cm x 80.0 cm 39.4" x 31.5" |
| Dimensions: ¹ (LxWxH) | 260.0 cm x 137.2 cm x 168.9 cm 102.4" x 54.0" x 66.5" |
| Shipping Dimensions: ¹ (LxWxH)A | 297.2 cm x 149.9 cm x 223.5 cm 117" x 59" x 88" |
| Net Weight: ¹ | 726 kg (1600 lbs) |
| Shipping Weight: ¹ | 871kg (1920 lbs) |
| Conveyor Speed: | 23 cm/s (45 ft/min) Forward or Reverse |
| Conveyor Height: | 70.6 cm (27.8") from Floor |
| Conveyor Capacity: | 220 kg (485 lbs) Evenly Distributed Load |

X-RAY GENERATOR & IMAGE PERFORMANCE

| | |
|---------------------------------|---|
| Voltage: | 180kV, Operating at 165kV |
| Tube Current: | 1.2 mA |
| Wire Resolution: ² | 40 AWG Typical, 38 AWG Standard |
| Steel Penetration: ² | 39 mm Typical, 37 mm Standard |
| Cooling: | Sealed Di-Electric Oil Bath with Forced Air |
| Duty Cycle: | 100%, No Warm-Up Procedure Required |
| Beam Direction: | Diagonally Upward |

COMPUTER & VIDEO

| | |
|---------------------|--------------------------------|
| Platform: | Windows® 10 OS |
| Display Type: | Dual 21.5" Flat Panel Monitors |
| Display Resolution: | 1920 x 1080 |
| Memory: | 8 GB RAM |
| Storage Capacity: | 256 GB SSD |

ENVIRONMENTAL

| | |
|------------------------|-----------------------------|
| Operating Temperature: | 0°C - 40°C / 32°F - 104°F |
| Storage Temperature: | -20°C - 60°C / -4°F - 140°F |
| Humidity: | Up to 95% Non-Condensing |

ELECTRICAL

| | |
|--------------------|---|
| System Power: | 110VAC +/- 10%, 50/60Hz, 15 Amp Max 220VAC +/- 10% 50/60Hz, 10 Amp Max |
| Power Conditioner: | Automatic Voltage Regulator (AVR), 600VA |

HEALTH & SAFETY

Compliant with USFDA Center for Devices and Radiation Health Standards for Cabinet X-Ray Systems (21-CFR 1020.40)
Typical radiation leakage is less than 0.1 mR/hr
(Leakage less than 0.5 mR/hr permitted by U.S. Federal Standards)

ISO 9001 & ISO 14001 CERTIFIED



¹Weight and dimensions of the system may vary depending on customization.

²As tested on Astrophysics Inc. Test Piece.

³Optional Features may affect lead time, price, and weight of product. Please contact your Astrophysics Sales Representative for more information.

Due to continued product development, Astrophysics Inc. reserves the right to amend all technical specifications without prior notice.
Contact sales@astrophysicsinc.com for the most updated brochures.

FEATURES

STANDARD

3 & 6 Color Imaging
Black & White Imaging
Enhanced Imaging™
High Penetration Function
Organic/Inorganic Imaging
Pseudo Color
Reverse Monochrome

Atomic Z-Number Measurement
Geometric Image Distortion Correction
Material Discrimination
Real-Time Image Manipulation

Auto Image Archiving
Image Review
Save Image (RGB)

Baggage Counter
Multi-Tier Accessibility
Network Ready
Real-Time Self Diagnostics

Image Annotation
JPEG Conversion
Print Image Capable

9 Quadrant Zoom
Continuous Scanning
Continuous Zoom Up to 64x
Vertical Zoom Panning

OPTIONAL

Artificial Intelligence (AI)
Barcode Scanning
Density Alert
Local Language
Safe Passage® Computer Based Training
Screener Assist Software
Test Case
Threat Image Projection (TIP) Software


Central Management System
Integration
Multiplexing

Conveyor Capacity Load Increase
External USB Ports
Variable Conveyor Speed

Footmat Operator Interlock
Sloped Conveyor

Internal/External UPS
Radiation Meter
Remote Workstation Configuration

Dual 24" Flat Panel Monitors
Custom Paint
Entry/Exit Roller Tables
Environmental Kit
8-Color Imaging

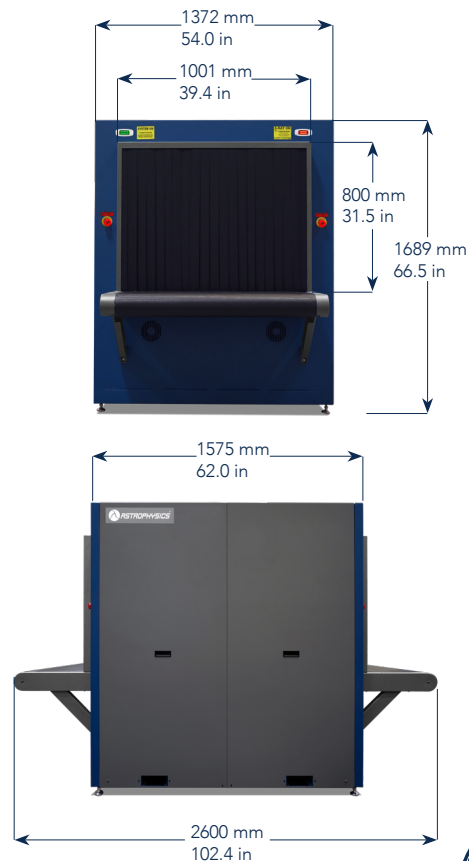

HOLD BAGGAGE

DCOH#2990 P/N 50-00-PB1 6-00 Rev.M

Astrophysics HQ
+1.909.598.5488

Astrophysics – EMEA
+961.9.832.500

Astrophysics – INDIA
+91.11.41709990

Astrophysics – ASIA
+63.2.812.0033